RESET FORM

HOLLOW METAL DOOR ORDER

Door specification, hardware preparation & locations

559 King Forest Court, Burlington, Ontario L7P 5C1
Tel (905) 335-1638 | Fax (905) 335-6822 | Toll Free 1-866-769-3667

Complete one sheet per door type. Blank fields use the standard shown in grey on page 2. Dimensions accept 84, 83-1/8, 83 1/8 or 83.125.

CUSTOMER | CONTACT | PHONE | EMAIL

PROJECT / JOB NAME | P.O. # | QUOTE # | DATE REQUIRED | DOOR MARK / TAG(S)

DOOR

HANDING	QTY	DOOR TAGS
LH		
RH		
LHR		
RHR		
PAIR		

Handing viewed from the outside (keyed / secure side).
Pairs: note active leaf handing in the tags column.

OPENING W | OPENING H (7/0 (84")) | CUSTOM H | DOOR W (AUTO) | DOOR H (AUTO)


Opening = frame rebate (e.g. 36 x 7/0). Pick Custom to type a height. 8/0 and taller get 4 hinges.

THICKNESS (1-3/4") | GAUGE (18 ga) | CORE (Honeycomb (standard))

EDGE / SERIES (Lock seam (standard)) | FIRE RATING (Non-rated) | UNDERCUT (3/4" (standard))

MATERIAL (Galvanneal A40 (standard)) | TOP CHANNEL (Standard (inverted))

HARDWARE PREPARATION & LOCATIONS

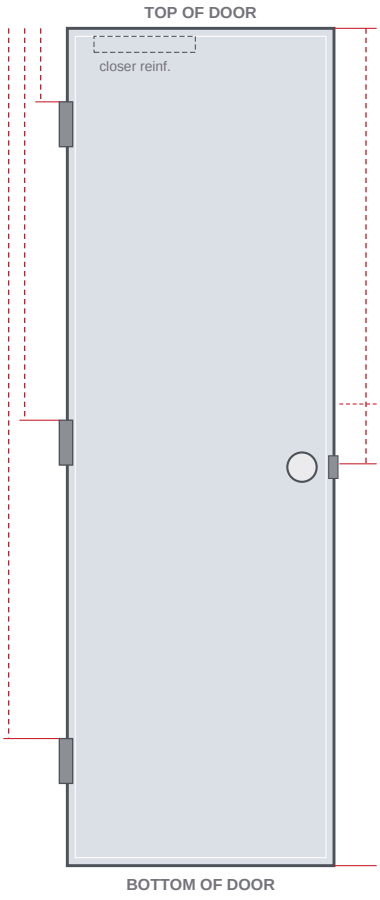

Enter lock CL from top of door (auto-fills to standard: 39-9/16" up cylindrical, 39-3/16" mortise). From-bottom is calculated.

HINGE PREP (Butt hinge - mortised) | SIZE (4-1/2") | WEIGHT (Standard)

LOCK PREP (161 cylindrical) | 161 CYLINDRICAL (2-3/4" backset, 2-1/8" bore)

DEADLOCK PREP (None) | BACKSET (2-3/4" (standard))

CLOSER / STOP REINFORCEMENT (Surface closer reinforcement (standard))

ASTRAGAL (PAIRS) (None) | FLUSH BOLTS (PAIRS) (None)

OTHER PREPS

- ☐ Thru-bolt push/pull reinf.
- ☐ Kick plate (no prep)
- ☐ Auto door bottom prep
- ☐ Viewer prep
- ☐ Surface bolt reinf.
- ☐ Holder / magnet reinf.

ELECTRIFIED PREPS

- ☐ Electric hinge / EPT
- ☐ Door position switch
- ☐ Card reader / mag lock reinf.
- ☐ Wire raceway (lock to hinge)
- ☐ Electrified lock / exit
- ☐ Junction box in door

EPT AT HINGE # | DPS LOCATION

HOLLOW METAL DOOR ORDER

Door specification, hardware preparation & locations

559 King Forest Court, Burlington, Ontario L7P 5C1
Tel (905) 335-1638 | Fax (905) 335-6822 | Toll Free 1-866-769-3667

VISION LITES & LOUVERS

Lite sizes are nominal (kit) sizes. Visible glass auto-fills at size less 1-1/4" (editable). Use Lite 2 for a double lite.

LITE 1 SIZE (W x H)	VISIBLE W	VISIBLE H	TOP OF DOOR TO LITE	LOCK EDGE ☐ CENTER	LITE KIT
None					Standard (1/2" glass max)

LITE 2 SIZE (W x H)	VISIBLE W	VISIBLE H	TOP OF DOOR TO LITE	LOCK EDGE ☐ CENTER	LAYOUT
None					Single lite

GLASS	REMOVABLE STOPS
By others	Pull side (standard)

Stiles / rails min. 6". Fire-rated doors: glazing per listing (100 sq.in on 3 hr).

LOUVER (KN CROWDER)	LOUVER SIZE (W x H)	LOUVER W	LOUVER H	LOUVER FINISH
None	None			Mineral bronze powder coat (std)

BTM OF DOOR TO LVR	LOCK EDGE TO LVR (CENTERED)

Louver centers on the door automatically.
Sizes are KN Crowder stock door cut-outs for the selected model. Fire-rated doors: SDL-FP only.

Select a louver to see its style

GENERAL NOTES / SPECIAL INSTRUCTIONS

STANDARD (UNLESS NOTED)

- Door: 1-3/4" thick, 18 ga galvanneal A40, honeycomb core, lock-seam edge, 16 ga top & bottom channels, unprimed.
- Clearances: 1/8" at jambs and head, 3/4" undercut. Door width = opening (rebate) width - 1/4". Door height = opening height - 7/8".
- Hinges: 4-1/2" standard weight templated butts, 10 ga reinforcement. 3 hinges to 7'6" opening height, 4 hinges to 10'0".
- Hinge locations (top of door to top of hinge): first 7-3/8"; last hinge 11-7/8" from bottom of door; intermediate hinges equally spaced.
  3-1/2" hinge: 7-7/8" / 11-3/8" 4" hinge: 7-5/8" / 11-5/8" 5" hinge: 7-1/8" / 12-1/8".
- Lock: 161 cylindrical prep, 2-3/4" backset, CL 39-9/16" from bottom of door (mortise: 39-3/16"). Surface closer reinforcement included.
- Fire-rated doors: label, glazing and hardware must suit the listing. Pairs: confirm active leaf, astragal and flush bolts.

APPROVAL

APPROVED BY (PRINT)	SIGNATURE	DATE (YYYY-MM-DD)

ALLDOOR USE ONLY

ALLDOOR ORDER #	SUPPLIER / FACTORY #	ENTERED BY	DATE

Please email the completed form to your Alldoor representative. Doors are made to order - please check all sizes before signing.